



Revised 3/25/91

## ORDELA MODEL 1202X

### POSITION-SENSITIVE PROPORTIONAL COUNTER

#### DESCRIPTION

The ORDELA Model 1202X is a linear, position-sensitive proportional counter (PSPC) designed and manufactured by ORDELA, Inc. for applications in small-angle scattering experiments with low-energy x-rays (<20 keV).

This PSPC uses resistance-capacitance position encoding, a method known for its reliability and simplicity of operation.<sup>1</sup> The active volume is 20 cm long, 5 cm high and 2.5 cm deep. The counting gas is Xe-CO<sub>2</sub> at atmospheric pressure. The window is 1.0 mm-thick, hot-rolled beryllium to reduce window absorption and scattering.

The Model 1202X includes two low-noise preamplifiers and a high-voltage filtering circuit. Analog and digital data processing instrumentation for position decoding and background discrimination are available from ORDELA, Inc. upon request. For best signal processing with the Model 1202X, we recommend the ORDELA Model AIM-206 Position Decoder for pulse shaping, timing, and pulse-height discrimination and a NIM/BIN power supply; and a 0 to 3 kV adjustable NIM high-voltage supply for biasing; and a 2048-channel MCA for display and imaging.

---

1. C. J. Borkowski and M. K. Kopp, J. Appl. Crystallogr. 11, 430 (1978).

#### SPECIFICATIONS

ACTIVE LENGTH:	200 mm
SPATIAL RESOLUTION:	500 pixels (picture elements)
PIXEL SIZE:	0.4 mm
THERMAL NOISE:	0.2 mm (fwhm) for an avalanche charge of 1.0 pC, measured with the Model AIM-206
DETECTION EFFICIENCY:	30% for 20 keV x-rays, >90% for <10 keV x-rays
WINDOW ABSORPTION:	40% for 6 keV x-rays, 20% for 8 keV x-rays, <10% for >10 keV x-rays
COUNT-RATE CAPABILITY:	4x10 <sup>3</sup> x-rays per second for 10% coincidence losses, maximum count rate 4x10 <sup>4</sup> x-rays per second
LINEARITY:	2% integral, 15% differential
PARALLAX ERROR:	1 mm at 2.3° beam incidence angle
BIAS VOLTAGE:	. 1.6 kV
PREAMPLIFIER POWER:	±12 V at 40 mA

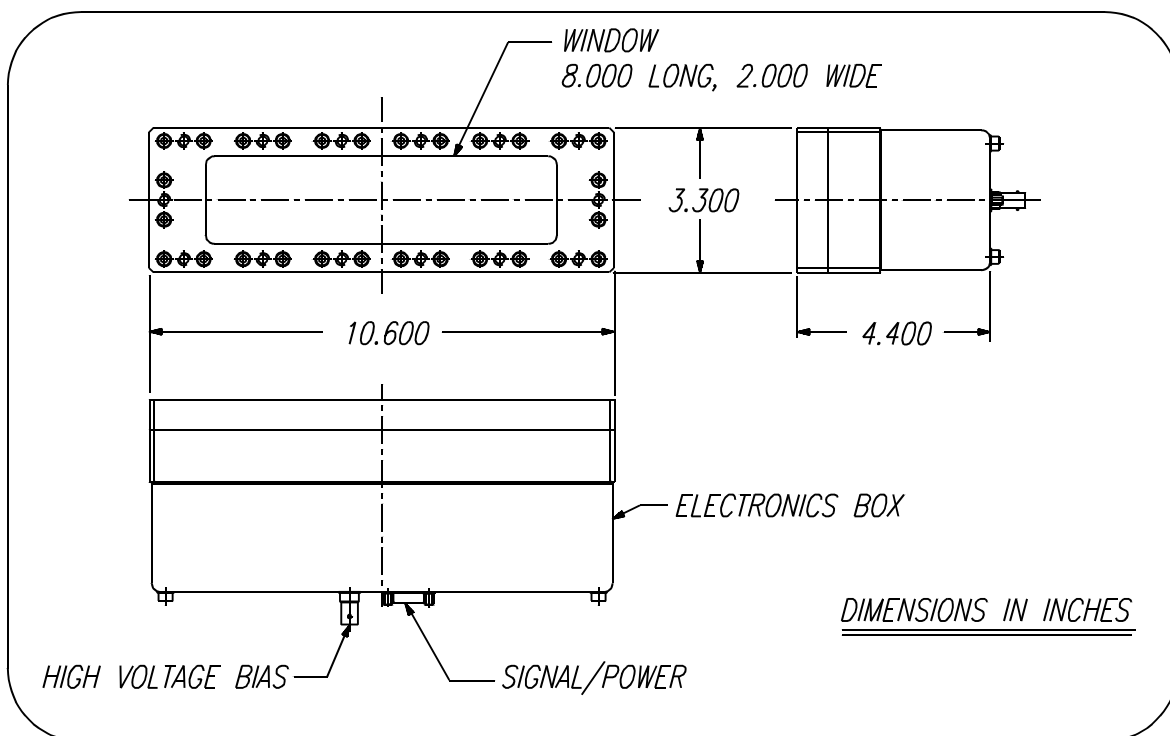
**COUNTER CONSTRUCTION**

BODY MATERIAL:	Aluminum 6061
WINDOW MATERIAL:	1.0-mm-thick hot-rolled beryllium
COUNTER VOLUME:	20 cm long, 5.0 cm wide, 2.5 cm deep
COUNTING GAS:	Xe-CO <sub>2</sub> at 760 torr
OVERALL DIMENSIONS:	27 cm long, 8.4 cm wide, 11.2 cm high

**ACCESSORIES**

Standard accessories, delivered with the Model 1202X at no extra cost are: (1) Two low-noise preamplifiers (ORDELA Model VS-03) and a high-voltage filter and distribution network which are installed and interconnected at the factory. (2) 3-m-long (10 ft) cables for interconnection of the Model 1202X with an ORDELA Model AIM-206 and the high-voltage power supply.

Optional accessories are: (1) A complete package of position decoding electronics for the Model 1202X. This package may be designed to customer specifications and will be shipped as a factory tested and calibrated system. (2) other lengths interconnection cables. (3) adapter cables and connectors permitting inter-connection of the Model 1202X with other than ORDELA's time decoding instruments.

**ORDELA MODEL 1202X OUTLINE AND DIMENSIONS****WARRANTY**

ORDELA, Inc. warrants its products to be free from defects in materials and workmanship for 12 months after shipment. No other warranty is included. Specifically, no warranty of merchantability or fitness for a particular purpose is implied. ORDELA's liability under this warranty is limited to repairing or replacing the product at ORDELA's option. This warranty is void if the product is operated improperly, disassembled, or modified other than in the ORDELA laboratory.